

Workshop Modules 10ft to 20ft



Description

Centurion Accommodation & Modular Workshop Modules are suitable for Zone I operation and are available for deploying to project sites worldwide. All units are supplied with a steel workbench complete with a vice as well as specially designed storage rack and tool hanger to provide an efficient, well-organised and secure tool storage. These modules provide a high quality for you and your clients.

Features & Benefits

- Container door for easy movement of tools and objects.
- Access door in addition to the container door for flexible access.
- 20' module equipped with a 2-ton capacity manual hoist.
- Overhead cabinets available in 20' modules for storage purposes.
- Steel workbench with a vice.
- Storage rack and tool hangers in 14' and 10' modules.
- Provision for installation of an Ex pressurisation fan inside the unit for fresh / cooler air.
- ATEX floodlight for external operation.
- CSC frame for minimised mobilization costs

Technical specifications

- **Slings:** 4 wire type, rated Max Gross Mass of 33,000 kg
- **Framework Design Temperature:** -20°C to +50°C
- **HVAC:** Available upon request
- **Electrical Connection:** Connection is 220-415Vac, 50/60Hz. Module is supplied with a 30m power cable as standard.

Dimensions and weight

20' Unit

6,058 (L) x 2,438 (W) x 2,591 (H) mm
 Tare Weight: 8,000 kg

14' Unit

4,260 (L) x 2,438 (W) x 2,591 (H) mm
 Tare Weight: 5,500 kg



10' Unit

3,670 (L) x 2,438 (W) x 2,591 (H) mm
 Tare Weight: 3,500 kg

Global compliance

ATEX, CE Marked, DNV 2.7-1, EN 12079
 (CSC for 10' and 20' units)

**Efficient, Safety-driven equipment, sales and rentals for
 our customers in the global critical industries**

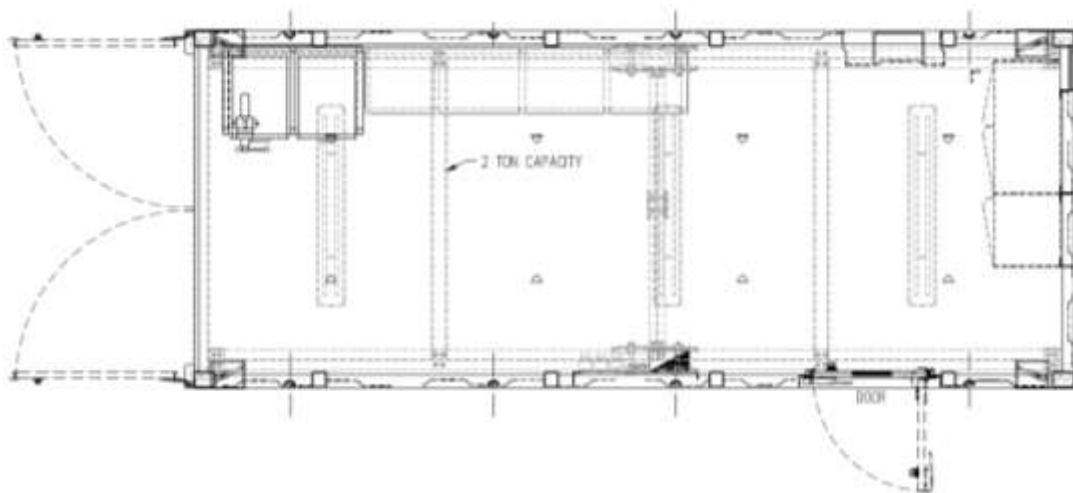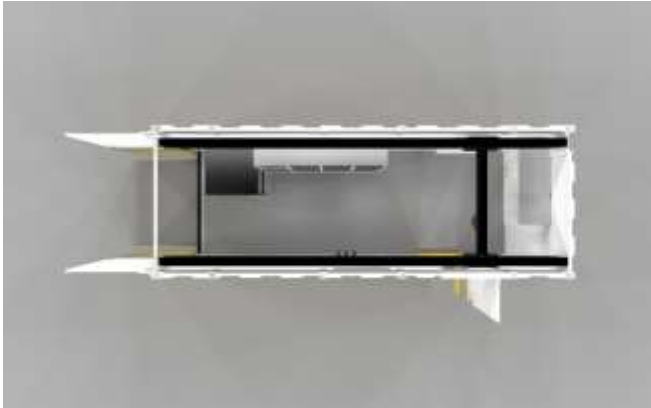

**Efficient, Safety-driven equipment, sales and rentals for
our customers in the global critical industries**