

Zone 1 NORSOK Office Modules 20ft



Description

Our NORSOK Z-015 certified Engineering Modules are designed to optimise workspace efficiency, meet environment and acoustic requirements and house your specialist equipment and resources in a safe and comfortable environment. Meeting NORSOK requirements for temporary buildings, all modules are manufactured in-house and can be outfitted and modified to perform any number of functions to suit your exact project requirements. These modules provide a high quality for you and your clients.

Features & Benefits

- All features of standard A60 Zone 1 office units.
- NORSOK compliant wiring systems and Hazardous Area installations.
- NORSOK compliant adjustable desk top and ceramic floor system.
- A60 window and A60 escape hatch (800mm x 800mm) as per NORSOK requirements.
- Easy access to all serviceable equipment for maintenance.
- Pneumatic fire dampers are provided with optional N2 bottle inside. Primary connection is rig air. Electric (24VDC) can be provided as an option.
- Fitted with non-combustible B15 wall panels to ensure high thermal resistance and superior noise reduction.
- CSC frame for minimised mobilization costs.

Technical specifications

- **Fire Rating:** A60 SOLAS
- **Framework Design Temperature:** Design temperature can be provided or constructed to the range of -20°C to +50°C
- **Detection and Alarm System:** With Control Pressurisation, Fire and Gas detection (CPFG) panel with all ancillary items for use up to Zone 1. Includes H2S and HC gas detection, smoke detection, manual call point, pressurisation fan, loss of pressure and flow devices.
- **HVAC:** 2 split type AHU type HVAC systems developed by Specialist Services to condition incoming pressurised air (hot, humid and cold).
- **Electrical Data:** Connection is 380-690Vac, 3Ph+E, 50/60Hz. Module is supplied with a 30m power cable as standard. 5kVA noise suppressor transformer provided for electrical sockets.

Dimensions and weight



20' Unit

6,058 (L) x 2,438 (W) x 2,591 (H) Tare Weight: 7,800 kg

Global Compliance

NORSOK, ATEX, IECEx, CE Marked, CSC, DNV 2.7-1, DNV 2.7-2, EN 12079, A60 SOLAS

**Efficient, Safety-driven equipment, sales and rentals for
our customers in the global critical industries**

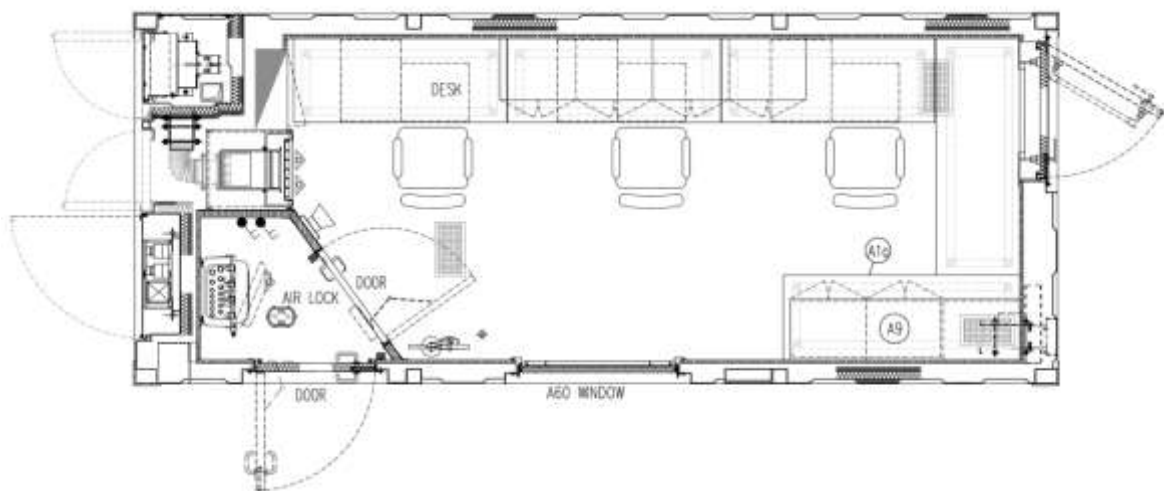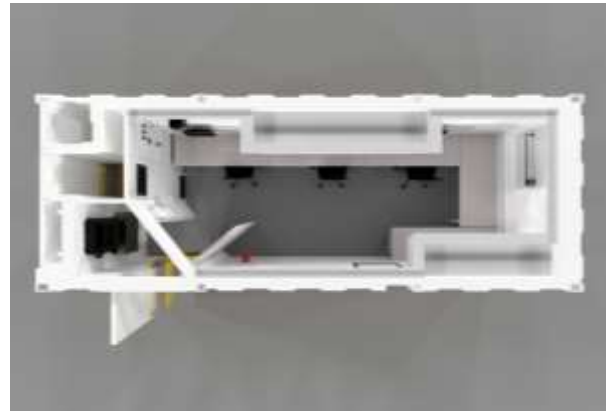

**Efficient, Safety-driven equipment, sales and rentals for
our customers in the global critical industries**